


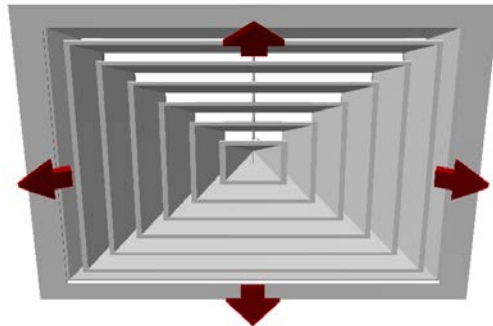

**Square Ceiling Diffuser
KTA**

**DESCRIPTION:**

KTA-S : Square ceiling diffuser with curved blades with fixed core

KTA-A : Square ceiling diffuser with curved blades with removable core

CONSTRUCTION:

Standard Product: Extruded Aluminum frame and core.

According to customer request: Extruded Aluminum frame, sheet core or sheet frame and core

APPLICATION:

Square ceiling diffuser can be manufactured according to the ceiling structure. It can be manufactured as 4-way as standard and can be manufactured as 1-2-3 way as optional.. Square ceiling diffusers KTA... for supply of cooled and heated air offices, shopping center etc...

FINISHING:

- Powder coated in RAL 9010 colour as standard
- Satin aluminum anodized
- Other colours on request

INSTALLATION:

- Screw {Standard}
- Clips
- Spring
- No Fixing


ACCESSORIES:

- PKD: Parallel blade damper, ZKD: Opposite blade damper
- PK: Plenum Box, KS: Mounting Frame
- 1,2,3 way models available



STANDARD SIZES:

Metric System (mm):

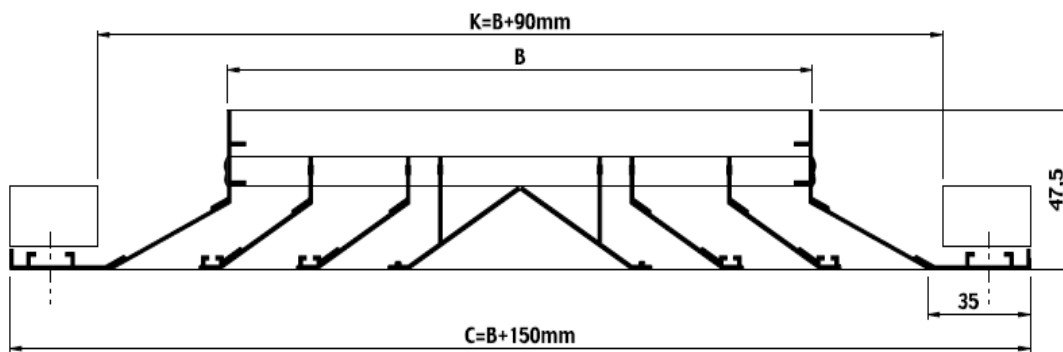


B : 150 - 225 - 300 - 375 - 445* - 450 - 525 - 600 mm

K : 240 - 315 - 390 - 465 - 535* - 540 - 615 - 690 mm

C : 300 - 375 - 450 - 525 - 595* - 600 - 675 - 750 mm

* Karolaj system Ceiling diffuser is optional when requested.

Imperial system (in):

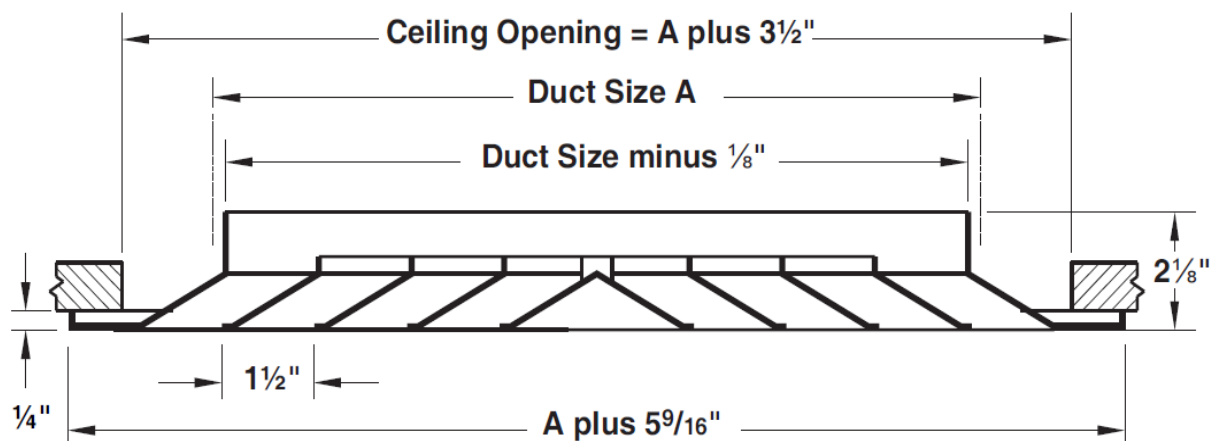


Duct Size A

* 6" x 6" * 9" x 9" * 12" x 12" * 18" x 18" * 24" x 24"
 * 8" x 8" * 10" x 10" * 15" x 15" * 21" x 21"




THROW DIRECTIONS:

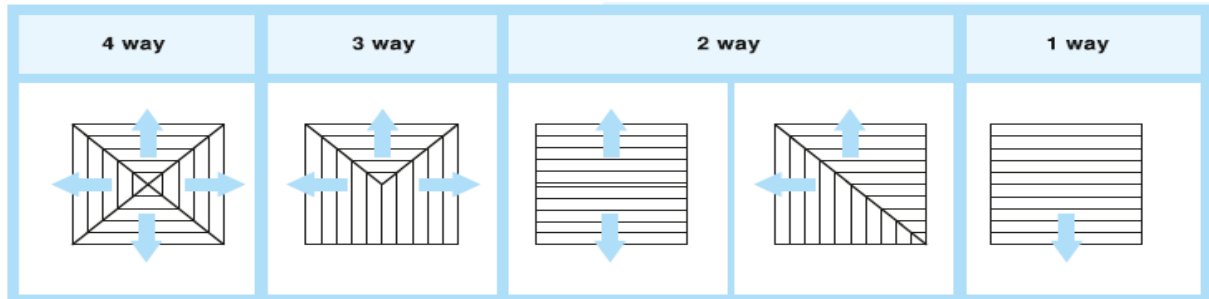

TECHNICAL DRAWINGS:



SQUARE CEILING DIFFUSER WITH REMOVABLE AND FIXED CORE

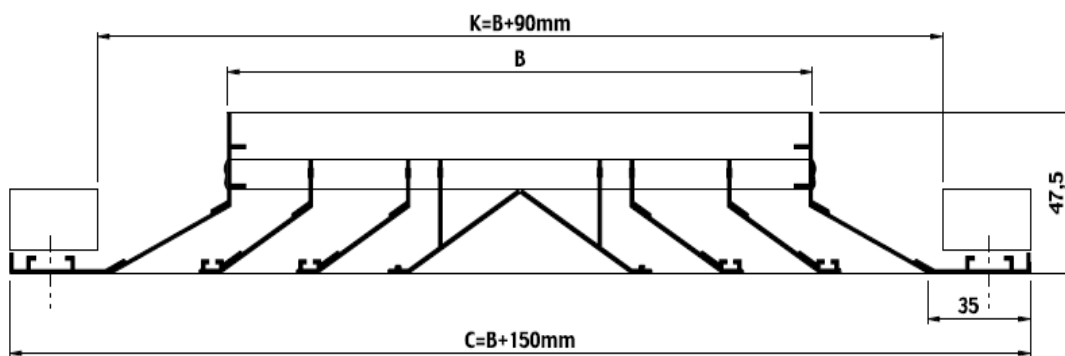


REMOVING CENTER CORE



1 - Push core sideways against spring

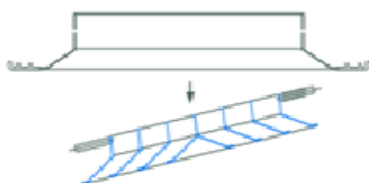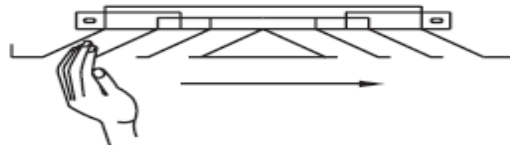


2- Push core sideways against spring

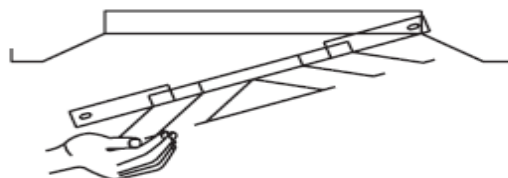




SQUARE CEILING DIFFUSER WITH PARALLEL BLADE DAMPER (KTA - PKD)

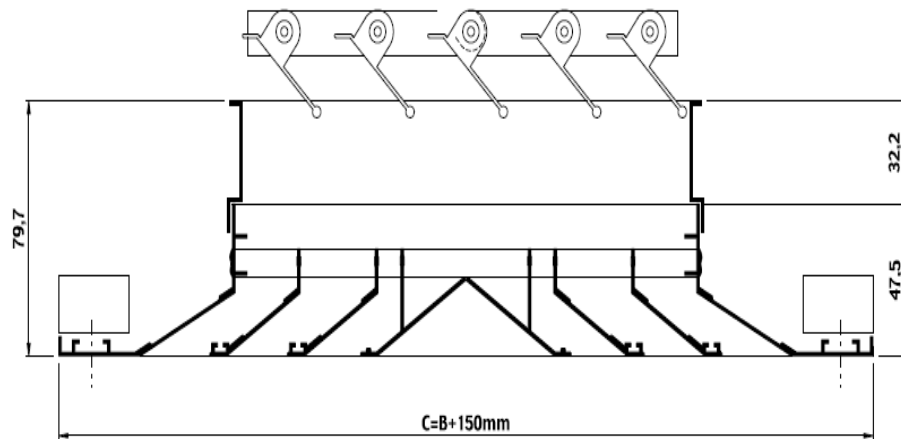

SQUARE CEILING DIFFUSER WITH OPPOSITE BLADE DAMPER (KTA - ZKD)

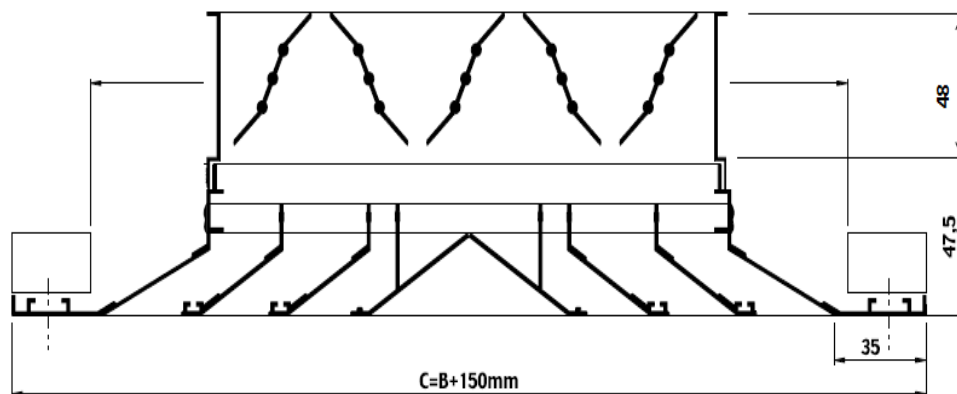

SQUARE CEILING DIFFUSER SELECTION:

EFFECTIVE AREA Ak(m²)

Neck Size - mm	150x150	225x225	300x300	375x375	450x450	525x525	600x600
Effective Area-Ak m ²	0,0109	0,0244	0,0435	0,0679	0,0978	0,1331	0,1739

Table-1



QUICK SELECTION TABLE

Neck Size WxH mm x mm	Effective Area m2	AIR VELOCITY m/s													
		1,5 m/s		2,0 m/s		2,5 m/s		3,0 m/s		4,0 m/s		5,0 m/s		6,0 m/s	
150x150	0,0109	58,86	m³/h	78,48	m³/h	98,10	m³/h	117,72	m³/h	156,96	m³/h	196,20	m³/h	235,44	m³/h
225x225	0,0244	131,76	m³/h	175,68	m³/h	219,60	m³/h	263,52	m³/h	351,36	m³/h	439,20	m³/h	527,04	m³/h
300x300	0,0435	234,90	m³/h	313,20	m³/h	391,50	m³/h	469,80	m³/h	626,40	m³/h	783,00	m³/h	939,60	m³/h
375x375	0,0679	366,66	m³/h	488,88	m³/h	611,10	m³/h	733,32	m³/h	977,76	m³/h	1222,20	m³/h	1466,64	m³/h
450x450	0,0978	528,12	m³/h	704,16	m³/h	880,20	m³/h	1056,24	m³/h	1408,32	m³/h	1760,40	m³/h	2112,48	m³/h
525x525	0,1331	718,74	m³/h	958,32	m³/h	1197,90	m³/h	1437,48	m³/h	1916,64	m³/h	2395,80	m³/h	2874,96	m³/h
600x600	0,1739	939,06	m³/h	1252,08	m³/h	1565,10	m³/h	1878,12	m³/h	2504,16	m³/h	3130,20	m³/h	3756,24	m³/h

Flow Rate m³/h

Table-2

RECOMMENDED MAXIMUM AIRFLOW

Ceiling Height, ft.	8	9	10	12	15	20
Airflow, cfm, per Side	200	350	550	900	1500	4000

Table-3

CORRECTIONS FOR MODEL TDCA (ADJUSTABLE PATTERN CONTROLLERS)

Nominal Neck Size	NC (add)		Total Pressure (Multiply)		Vertical Throw (Multiply)		
					Cooling 20 F	Heating, ΔT	
	H	V	H	V		0 F	20 F
6 x 6	3	7	1.3	1.6	1.3	1.1	0.8
9 x 9	3	7	1.5	2.3	1.4	1.2	0.72
12 x 12	3	7	1.5	2.3	1.5	1.25	0.65
15 x 15	3	7	1.5	2.3	1.55	1.27	0.62
18 x 18	3	7	1.5	2.3	1.6	1.3	0.59
21 x 21	3	7	1.5	2.3	1.65	1.35	0.57
24 x 24	3	7	1.5	2.3	1.1	1.1	0.55

Table-4



1 and 2 Way Selection

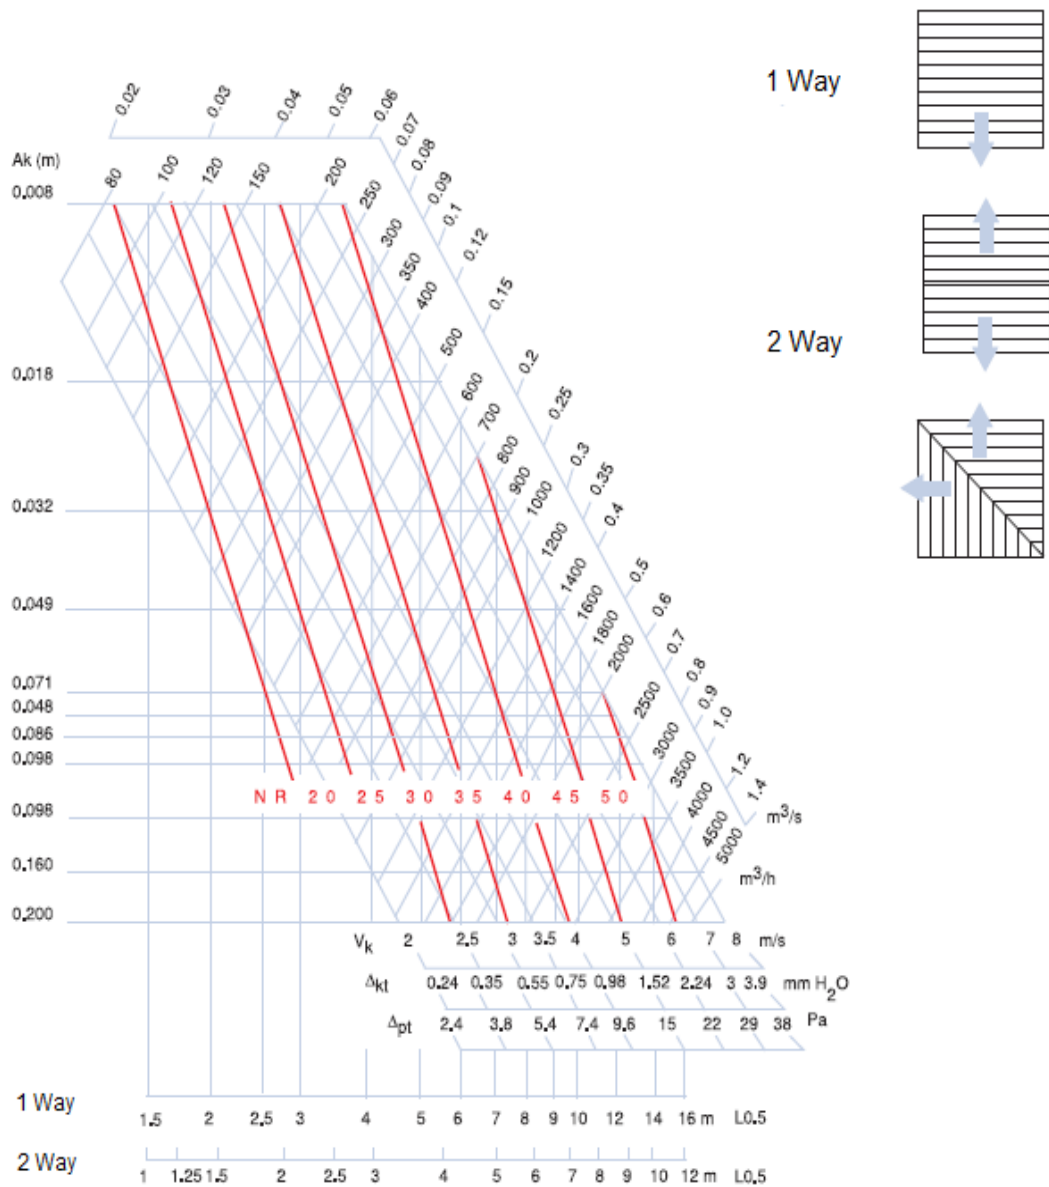


Diagram-1



3 and 4 Way Selection

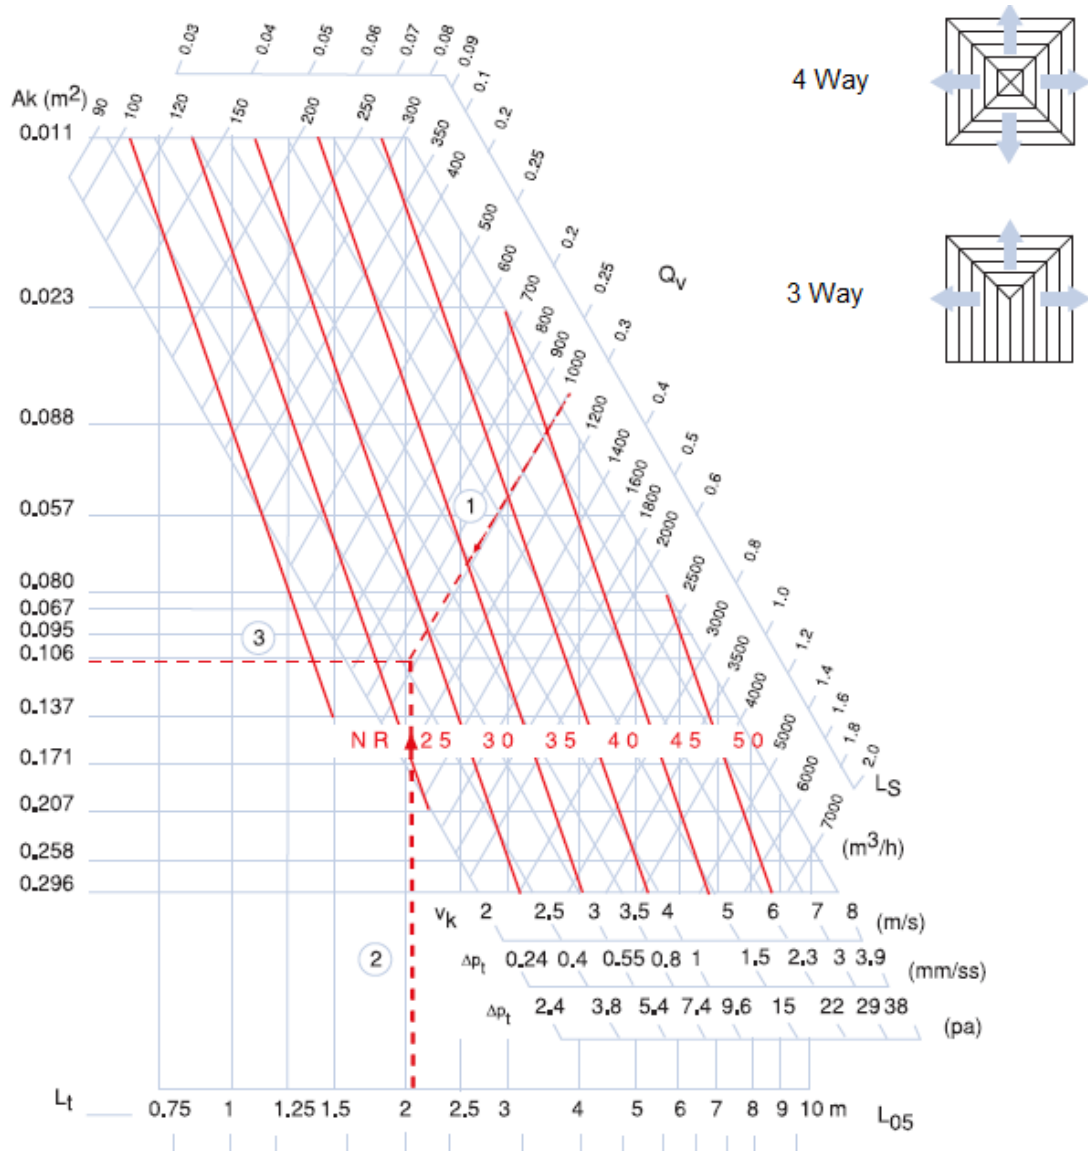


Diagram-2

V_t (m/s) Shooting Distance Correction Table

V_t (m/s)	0,25	0,375	0,5	0,625	0,75
L_t (m)	x 2	x 1,33	x 1	x 0,8	x 0,67

Table-5



Sound Level and Pressure Loss Correction Chart by Pressure Control Damper Open Position

Damper Position	100 % Open	50 % Open	25 % Open
Pt X 1.00	Pt X 1.00	Pt X 2.25	Pt X 5.90
LW + 0	LW + 0	LW +10	LW +20

Table-6

AIR DISTRIBUTION DIAGRAM

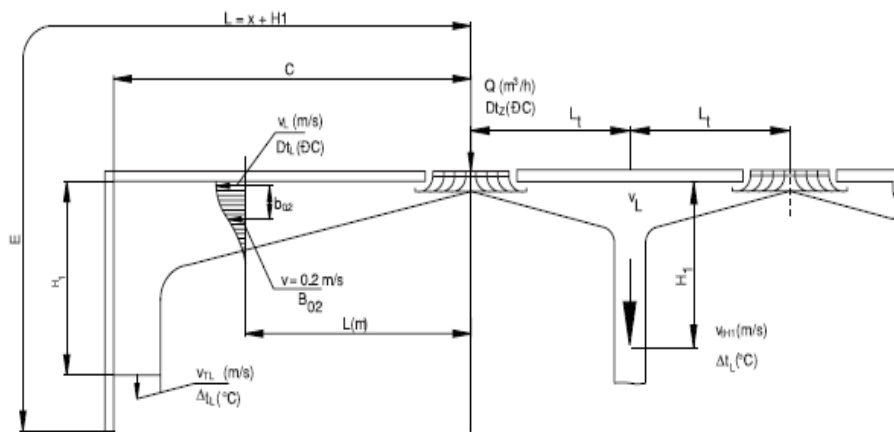


Diagram-3

9" x 9" Model TDC / 4-Way Diffuser
 240 cfm Total
 20°F Cooling Differential

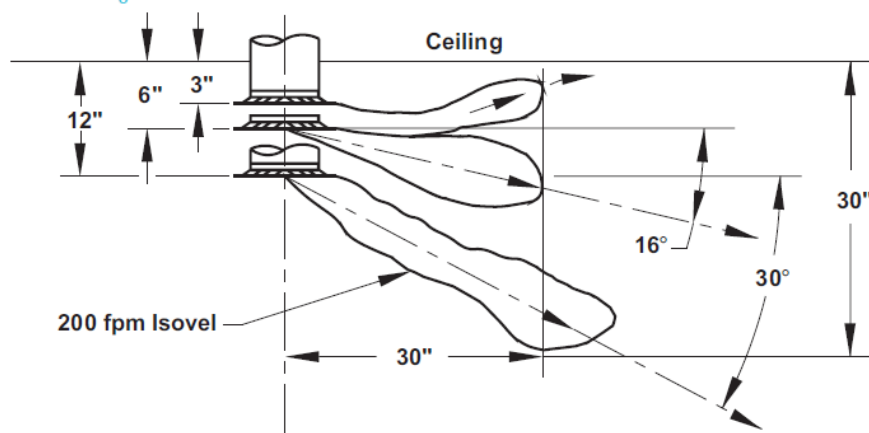


Diagram-4



IMPERIAL PERFORMANCE DATA


		Neck Vel. Vel. Pressure Total Pressure	300 0.006 0.042	400 0.010 0.075	500 0.016 0.117	600 0.022 0.169	700 0.031 0.229	800 0.040 0.300	900 0.050 0.379
Return Factors -SP = 1.1 TP NC + 1		Total cfm NC Side	75 - -	100 13 -	125 16 -	150 23 -	175 27 -	200 31 -	225 34 -
6 x 6 0.25 ft ²	S1	X	75 8-10-14	100 9-11-18	125 10-13-18	150 11-14-20	175 12-15-21	200 13-16-23	225 14-17-24
	S2&G2	X & Y	38 4-8-10	50 5-8-12	63 6-10-14	75 8-10-15	88 9-11-18	100 10-12-17	113 10-13-18
	A3	X	28 4-8-9	38 5-7-11	47 6-9-12	58 7-9-13	68 8-10-14	75 9-11-15	84 9-11-16
	A4	Y	19 3-5-8	25 4-7-9	31 6-7-10	38 7-8-11	44 7-9-12	50 8-9-13	58 8-10-14
9 x 9 0.56 ft ²	S1	X	169 11-15-21	225 14-17-24	281 16-18-27	338 17-21-30	394 18-23-32	450 20-24-34	506 21-26-36
	S2&G2	X & Y	84 8-9-18	113 9-11-18	141 10-14-20	169 11-16-22	197 13-17-24	225 15-18-26	253 16-19-27
	A3	X	63 8-10-14	84 9-11-18	106 10-13-18	127 11-14-20	148 12-15-21	169 13-16-23	190 14-17-24
	A4	Y	42 4-7-12	58 7-10-14	70 8-11-16	84 10-12-17	98 11-13-18	113 11-14-20	127 12-15-21
12 x 12 1.00 ft ²	S1	X	42 4-7-12	58 7-10-14	70 8-11-16	84 10-12-17	98 11-13-18	113 11-14-20	127 12-15-21
	S2&G2	X & Y	189 11-15-21	225 14-17-24	281 16-18-27	338 17-21-30	394 18-23-32	450 20-24-34	506 21-26-36
	A3	X	84 8-9-18	113 9-11-18	141 10-14-20	169 11-16-22	197 13-17-24	225 15-18-26	253 16-19-27
	A4	Y	63 8-10-14	84 9-11-18	106 10-13-18	127 11-14-20	148 12-15-21	169 13-16-23	190 14-17-24
15 x 15 1.56 ft ²	S1	X	42 4-7-12	58 7-10-14	70 8-11-16	84 10-12-17	98 11-13-18	113 11-14-20	127 12-15-21
	S2&G2	X & Y	300 15-20-28	400 18-23-32	500 21-25-36	600 23-28-39	700 25-30-43	800 28-32-48	900 28-34-48
	A3	X	150 8-11-21	200 10-15-24	250 13-18-27	300 16-21-30	350 18-23-32	400 20-24-34	450 21-26-36
	A4	Y	113 11-13-18	150 12-15-21	188 14-17-24	225 15-18-26	263 16-19-27	300 17-21-30	338 18-23-32
18 x 18 2.25 ft ²	S1	X	75 8-10-18	100 9-13-19	125 11-15-21	150 13-16-23	175 14-17-25	200 15-18-26	225 16-20-28
	S2&G2	X & Y	469 18-25-35	625 23-29-40	781 26-32-45	938 29-35-49	1094 31-38-53	1250 33-40-57	1406 35-43-60
	A3	X	234 10-14-28	313 13-18-30	391 16-24-34	469 19-28-37	547 22-32-40	625 25-30-43	703 28-32-45
	A4	Y	178 13-18-23	234 16-19-27	293 17-21-30	352 19-23-33	410 20-25-35	468 22-27-36	527 23-28-40
21 x 21 3.06 ft ²	S1	X	117 7-12-20	158 11-18-23	195 14-18-26	234 18-20-28	273 18-22-31	313 19-23-33	352 20-25-35
	S2&G2	X & Y	675 23-30-42	900 28-34-48	1125 33-40-58	1350 34-42-59	1575 37-45-64	1800 39-48-68	2025 42-51-73
	A3	X	338 11-17-31	450 15-23-38	563 19-29-41	675 23-31-44	788 27-34-48	900 30-38-51	1013 31-38-54
	A4	Y	253 18-20-28	338 18-23-32	422 21-25-38	508 23-28-39	591 24-30-42	675 26-32-45	759 28-34-48
24 x 24 4.00 ft ²	S1	X	189 9-15-24	225 13-20-28	281 17-22-31	338 20-24-34	394 21-28-37	450 23-28-39	508 24-30-42
	S2&G2	X & Y	919 27-35-49	1225 33-40-58	1531 38-45-63	1838 40-48-69	2144 43-53-75	2450 46-58-80	2756 48-60-85
	A3	X	459 13-20-37	613 18-27-42	768 22-33-47	919 27-37-52	1072 31-40-58	1225 35-42-60	1378 37-45-63
	A4	Y	345 19-23-32	459 22-28-37	574 24-30-42	689 26-32-48	804 28-35-49	919 31-37-53	1034 32-40-58
24 x 24 4.00 ft ²	S1	X	230 10-17-28	308 18-23-32	383 19-28-38	459 23-28-40	538 25-30-43	613 27-32-48	689 28-34-49
	S2&G2	X & Y	1200 31-39-58	1600 37-48-64	2000 42-51-72	2400 48-58-79	2800 49-60-85	3200 53-64-91	3600 58-68-97
	A3	X	800 15-23-42	1000 20-30-48	1200 25-38-54	1400 30-42-59	1600 35-45-64	1800 39-48-68	2000 42-51-72
	A4	Y	450 21-28-37	600 26-30-43	750 28-34-48	900 30-37-52	1050 33-40-58	1200 35-43-60	1350 37-45-64
24 x 24 4.00 ft ²	S1	X	300 12-20-32	400 18-28-37	500 22-29-41	600 26-32-45	700 28-35-49	800 30-37-52	900 32-39-58
	S2&G2	X & Y	300 12-20-32	400 18-28-37	500 22-29-41	600 26-32-45	700 28-35-49	800 30-37-52	900 32-39-58
	A3	X	300 12-20-32	400 18-28-37	500 22-29-41	600 26-32-45	700 28-35-49	800 30-37-52	900 32-39-58
	A4	Y	300 12-20-32	400 18-28-37	500 22-29-41	600 26-32-45	700 28-35-49	800 30-37-52	900 32-39-58

Table-7




MOUNTING DETAILS


Screw Mounting Details

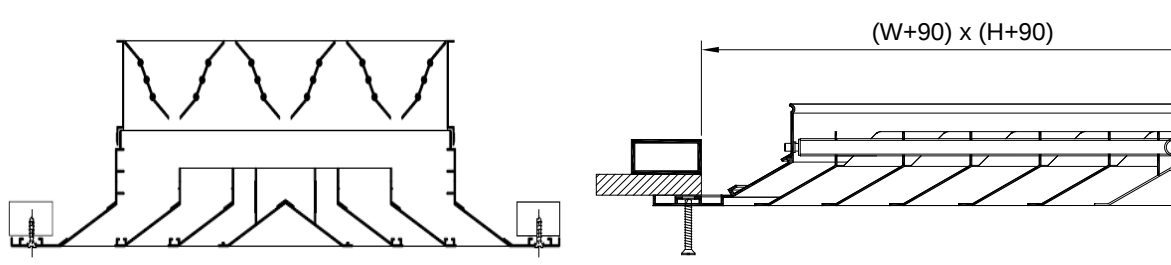


Clips Mounting Details

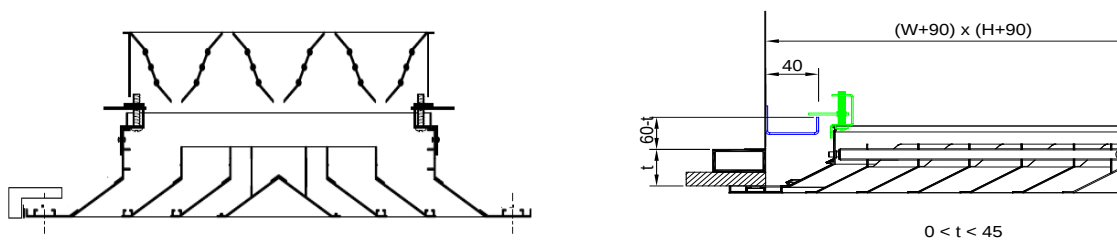


Spring Mounting Details

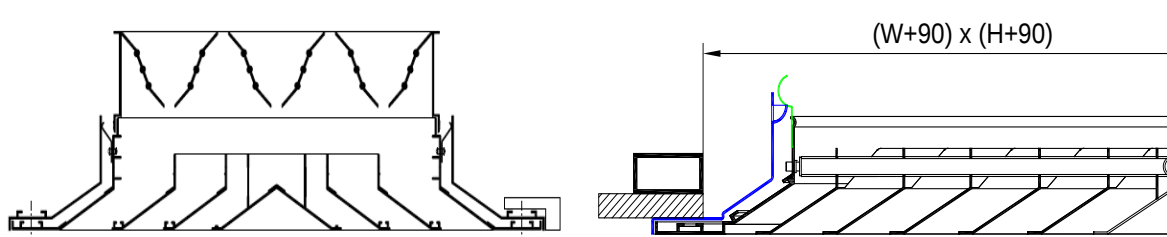

Snap-in

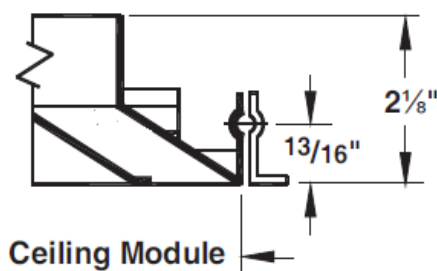


Lay-in

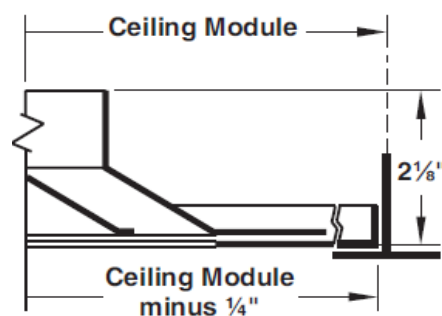




Karolaj Ceiling Mounting Details

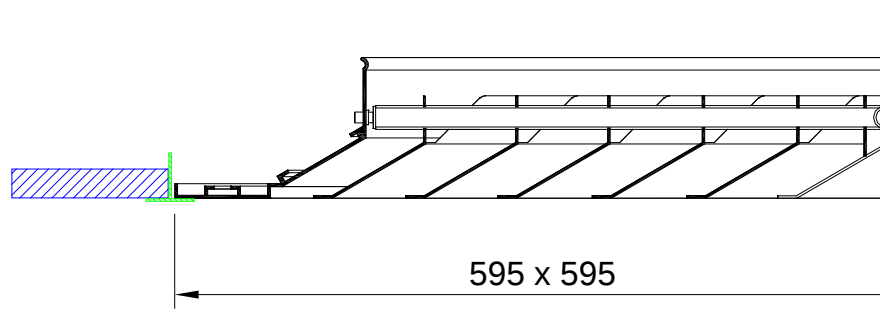


Clipin Ceiling Mounting Details

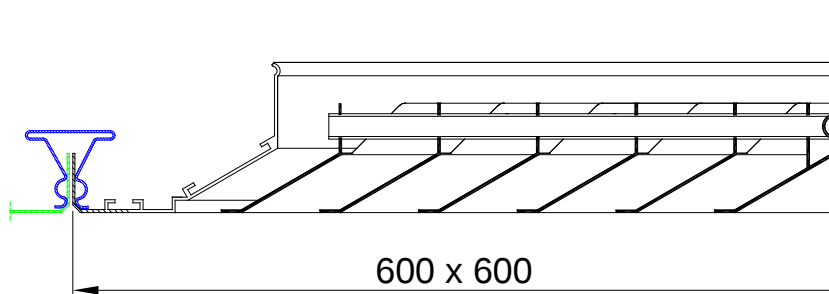



PLENUM BOX MOUNTING DETAILS

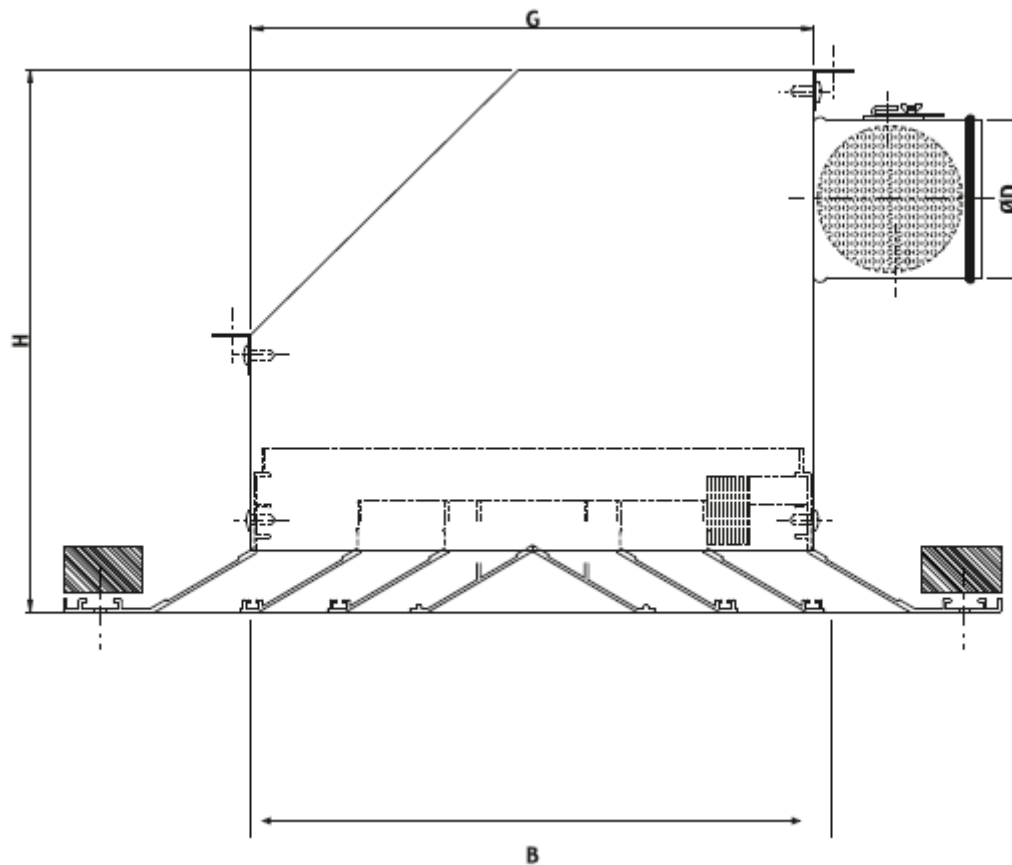


PLENUM BOX DIMENSION


B	150	225	300	375	445	450	485	525	600
D	100	150	200	250	250	250	250	300	300
H	250	300	400	450	450	450	450	500	500
G	153	228	303	378	448	543	488	525	603



CEILING MOUNTING DETAILS

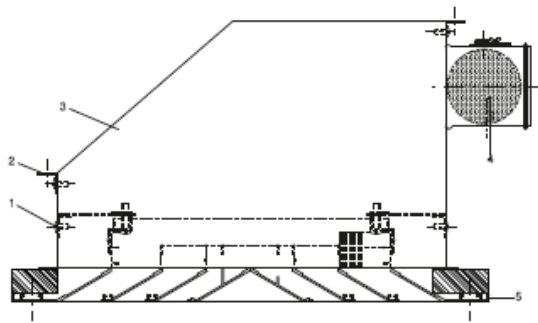


CLIPS MOUNTING (without insulation)

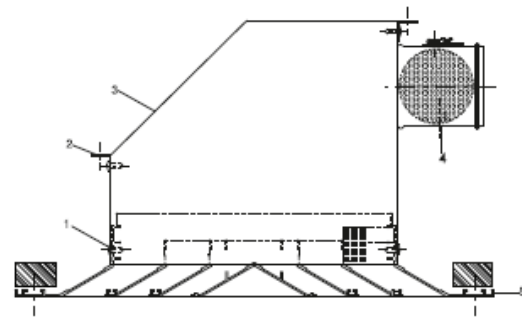


SCREW MOUNTING (without insulation)

- 1-Screw
- 2-L Profile
- 3-Plenum box
- 4-Perforated damper
- 5-Square ceiling diffuser
- 6-Insulation
- 7-Clips
- 8-L profile for clips

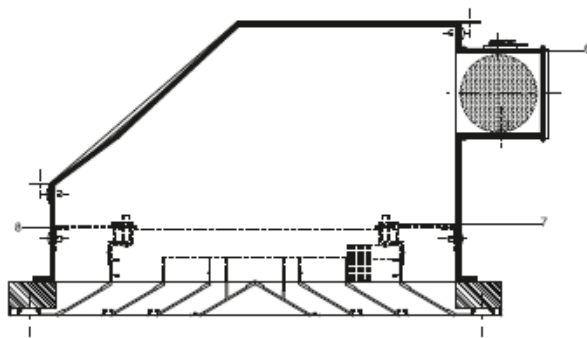




CLIPS MOUNTING (with insulation)

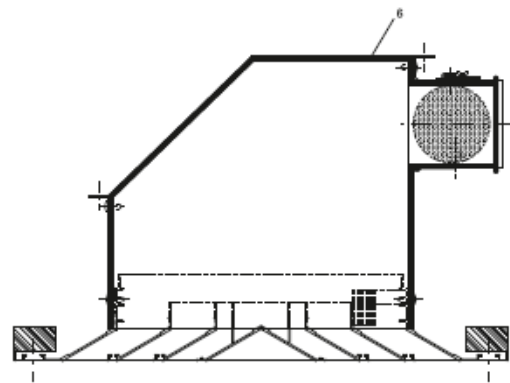

SCREW MOUNTING (with insulation)



SPECIAL CEILING MOUNTING DETAILS

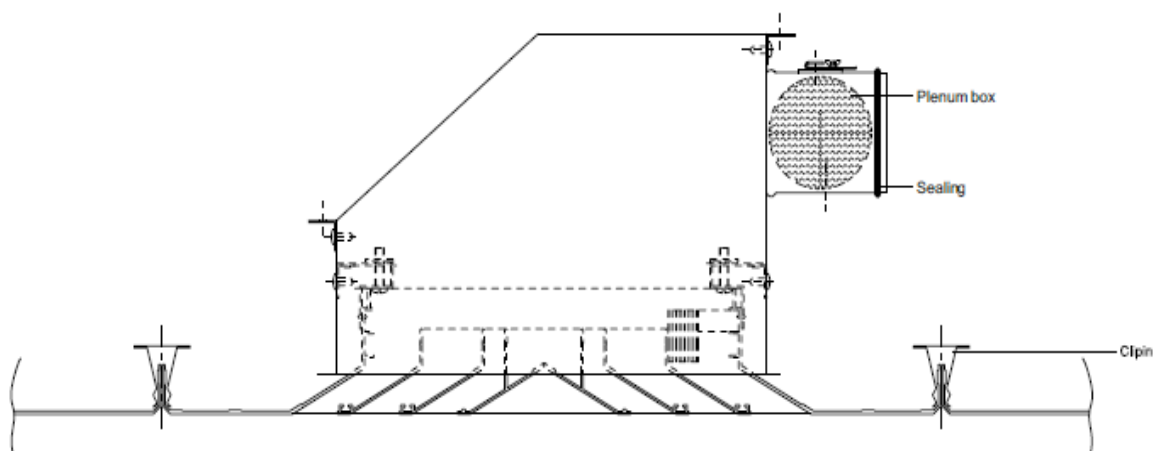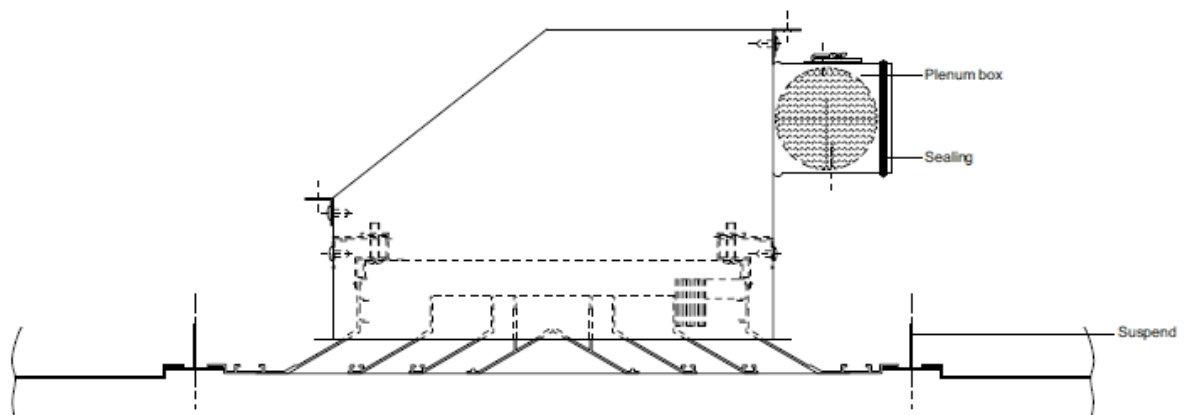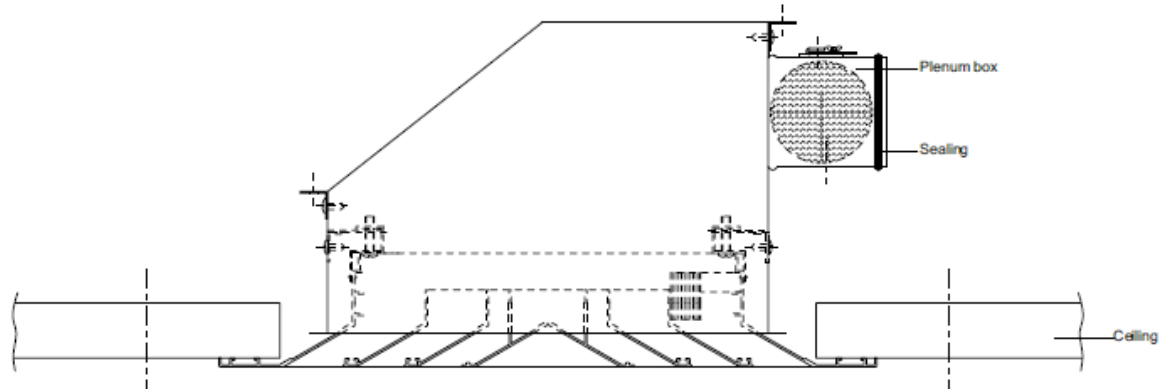



ORDER CODE

KTA	A	4	PKD	RAL9010	VD	W 300X300
S : Fixed Core A : Adjustable Core						W: Neck Size C: Frame Size
1 Way = 1 2 Way = 2 3 Way = 3 4 Way = 4						XX: without Mounting VD: Screw Mounting KP: Bridge Mounting KS: Mounting Frame
000: Without Damper ZKD: Opposite Blade Damper PKD: Parallel Blade Damper						00: Without Coating EL: Satin Anodized RAL----: Powder Coating