



MODEL PRD


Project:
Tag:
Engineer:
Contractor:
Date:

Pressure Relief Damper




Under – Over – pressure relief vent, depends on orientation.
Standard opening pressures (pressure at which the flap begins to open) 10, 20, 30, 40, 45, 50 Pa
Temperature range $-20 \div 80^{\circ}\text{C}$.
Made from combination of aluminium and steel
Epoxy-polyester powder coating RAL 7032
Suitable for installation according to EN 12101-6


Installation

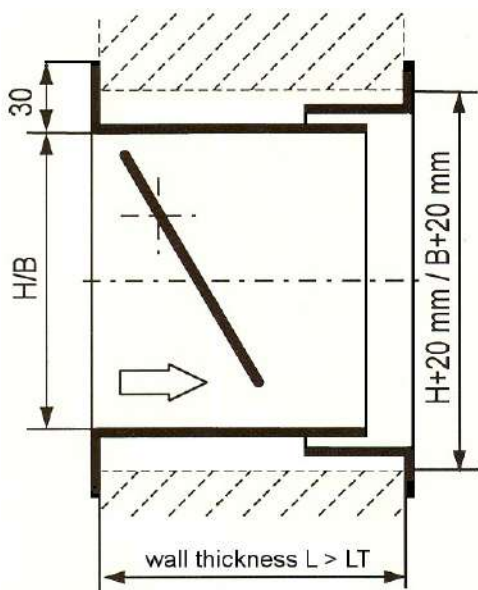

Wall form "W"

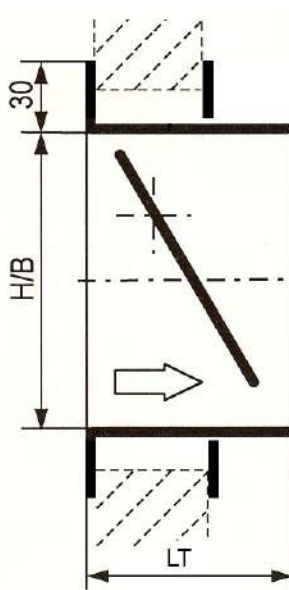

Wall form "T"

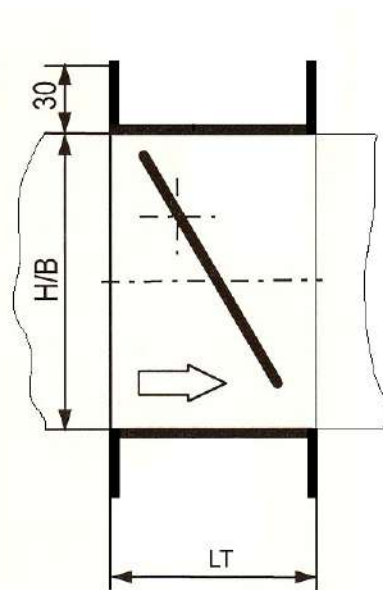

Duct form "D"

As part of our continuous improvement program, we reserve the right to make further improvements without notice.

Date submitted:





MODEL PRD-1

Project:
Tag:
Engineer:
Contractor:
Date:

Pressure Relief Damper




Type-1

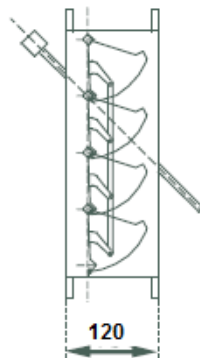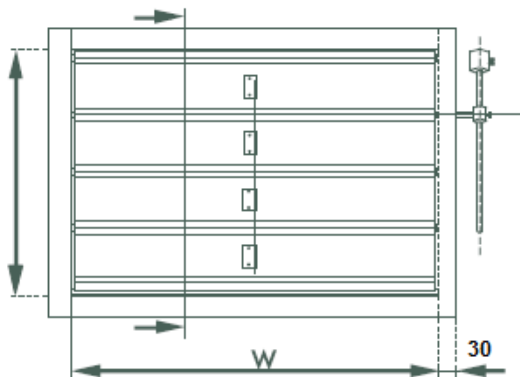

A-A



Type-2

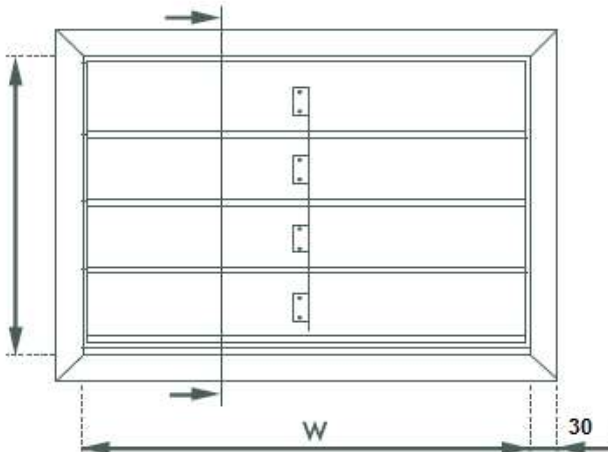

As part of our continuous improvement program, we reserve the right to make further improvements without notice.

Date submitted: