


Motorized Multi-Leaf Damper Performance Data


VCD-M EFFECTIVE AREA TABLE (m²)

S [m ²]		B [mm]																	
		300	400	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000
H [mm]	210	0,063	0,084	0,105	0,126	0,147	0,168	0,189	0,210	0,231	0,252	0,273	0,294	0,315	0,336	0,357	0,378	0,399	0,420
	310	0,093	0,124	0,155	0,186	0,217	0,248	0,279	0,310	0,341	0,372	0,403	0,434	0,465	0,496	0,527	0,558	0,589	0,620
	410	0,123	0,164	0,205	0,246	0,287	0,328	0,369	0,410	0,451	0,492	0,533	0,574	0,615	0,656	0,697	0,738	0,779	0,820
	510	0,153	0,204	0,255	0,306	0,357	0,408	0,459	0,510	0,561	0,612	0,663	0,714	0,765	0,816	0,867	0,918	0,969	1,020
	610	0,183	0,244	0,305	0,366	0,427	0,488	0,549	0,610	0,671	0,732	0,793	0,854	0,915	0,976	1,037	1,098	1,159	1,220
	710	0,213	0,284	0,355	0,426	0,497	0,568	0,639	0,710	0,781	0,852	0,923	0,994	1,065	1,136	1,207	1,278	1,349	1,420
	810	0,243	0,324	0,405	0,486	0,567	0,648	0,729	0,810	0,891	0,972	1,053	1,134	1,215	1,296	1,377	1,458	1,539	1,620
	910	0,273	0,364	0,455	0,546	0,637	0,728	0,819	0,910	1,001	1,092	1,183	1,274	1,365	1,456	1,547	1,638	1,729	1,820
	1010	0,303	0,404	0,505	0,606	0,707	0,808	0,909	1,010	1,111	1,212	1,313	1,414	1,515	1,616	1,717	1,818	1,919	2,020
	1110	0,333	0,444	0,555	0,666	0,777	0,888	0,999	1,110	1,221	1,332	1,443	1,554	1,665	1,776	1,887	1,998	2,109	2,220
	1210	0,363	0,484	0,605	0,726	0,847	0,968	1,089	1,210	1,331	1,452	1,573	1,694	1,815	1,936	2,057	2,178	2,299	2,420
	1310	0,393	0,524	0,655	0,786	0,917	1,048	1,179	1,310	1,441	1,572	1,703	1,834	1,965	2,096	2,227	2,358	2,489	2,620
	1410	0,423	0,564	0,705	0,846	0,987	1,128	1,269	1,410	1,551	1,692	1,833	1,974	2,115	2,256	2,397	2,538	2,679	2,820
	1510	0,453	0,604	0,755	0,906	1,057	1,208	1,359	1,510	1,661	1,812	1,963	2,114	2,265	2,416	2,567	2,718	2,869	3,020
	1610	0,483	0,644	0,805	0,966	1,127	1,288	1,449	1,610	1,771	1,932	2,093	2,254	2,415	2,576	2,737	2,898	3,059	3,220
	1710	0,513	0,684	0,855	1,026	1,197	1,368	1,539	1,710	1,881	2,052	2,223	2,394	2,565	2,736	2,907	3,078	3,249	3,420
	1810	0,543	0,724	0,905	1,086	1,267	1,448	1,629	1,810	1,991	2,172	2,353	2,534	2,715	2,896	3,077	3,258	3,439	3,620
	1910	0,573	0,764	0,955	1,146	1,337	1,528	1,719	1,910	2,101	2,292	2,483	2,674	2,865	3,056	3,247	3,438	3,629	3,820
	2010	0,603	0,804	1,005	1,206	1,407	1,608	1,809	2,010	2,211	2,412	2,613	2,814	3,015	3,216	3,417	3,618	3,819	4,020

VCD-M PRESSURE DROP AND NOISE LEVELS

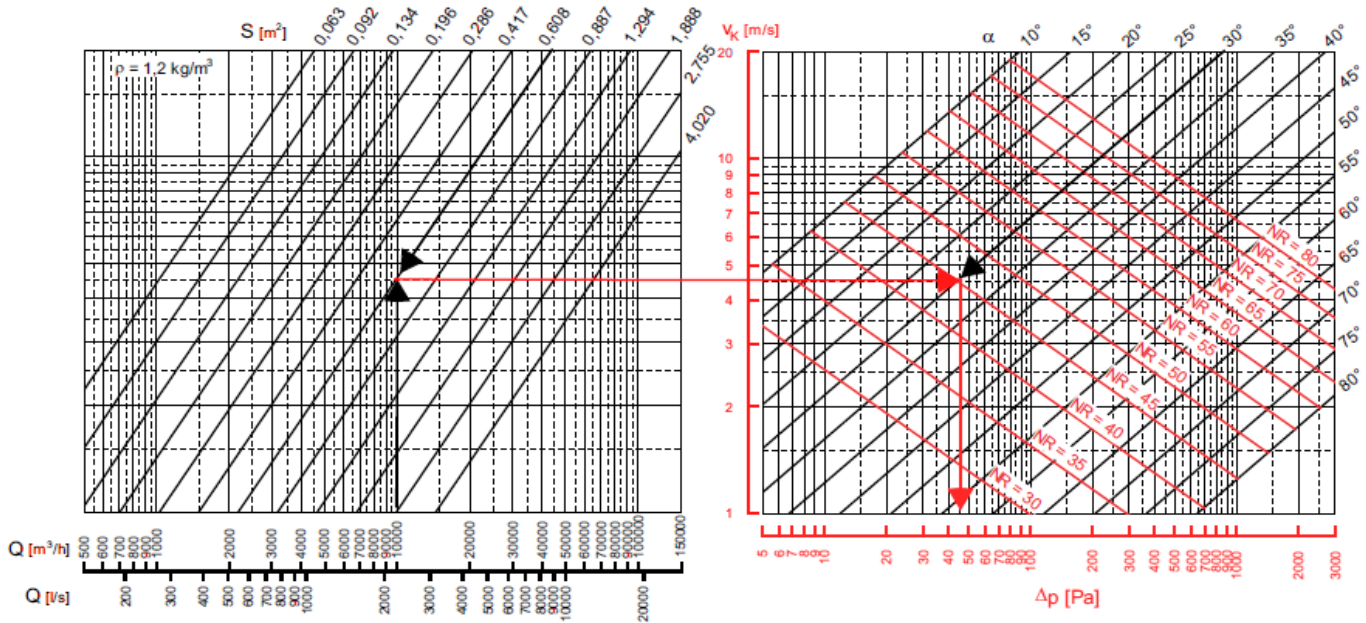

Q [m³/h] [l/s] through air flow rate
 S [m²] Damper surface area
 v_k [m/s] velocity relating to the effective outlet area S
 Δp [Pa] total pressure loss
 α angle of inclination of the blade
 NR noise rating (ISO standard, in relation to 10^{-12} W) taking no account of the attenuation of the room



Submittal No.	Revision:	Date: 01/01/2019	Submitted by:	Date submitted:
---------------	-----------	------------------	---------------	-----------------