**DESCRIPTION:**

Access doors are used in ducts to allow the access to important components that may need to be serviced and/or tested such as fire, fire/smoke and smoke dampers.

MATERIAL:

- All-steel construction
- 1" fiberglass insulation (Cover)

PRODUCT FEATURES:

- 24 Gauge galvanized steel door panel
- 22 Gauge galvanized steel frame
- 1" fiberglass insulation
- Hinged with locking cam
- Available in various square sizes ranging from 6"x6" to 24"x24"
- Special sizes available

FINISHING :


- Standard galvanized steel (no painted)

INSTALLATION :

- Mounting from the tabs inside the cover.



AVAILABLE SIZES (in) :

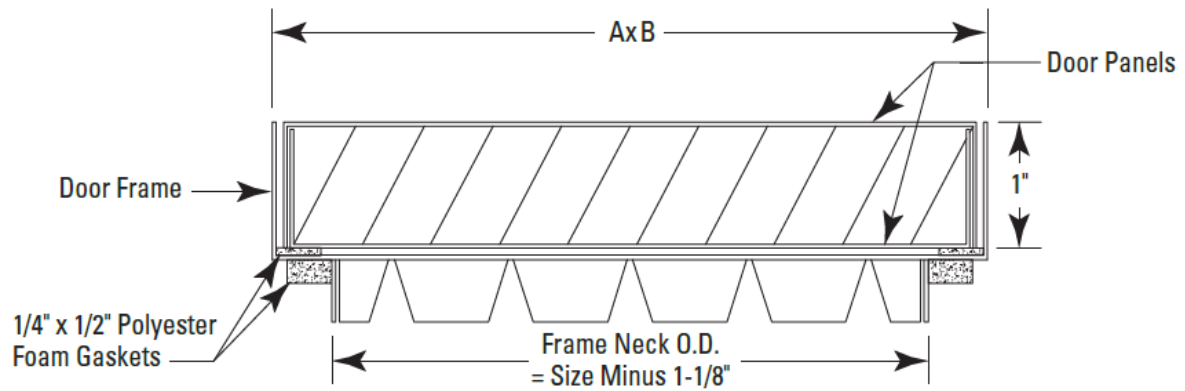

Size	Dim. A Width	Dim. B Height	Frame Neck OD
6 x 6	6	6	4-7/8" x 4-7/8"
8 x 8	8	8	6-7/8" x 6-7/8"
10 x 10	10	10	8-7/8" x 8-7/8"
12 x 12	12	12	10-7/8" x 10-7/8"
14 x 14	14	14	12-7/8" x 12-7/8"
16 x 16	16	16	14-7/8" x 14-7/8"
18 x 18	18	18	16-7/8" x 16-7/8"
20 x 20	20	20	18-7/8" x 18-7/8"
24 x 24	24	24	22-7/8" x 22-7/8"

**MOUNTING DETAILS:**



ORDER CODE :

HAD-2		00	SM	D 8"x8"
HAD-1 HAD-2				D = Out Size
00: No coating		SM: Standard Mounting		
RAL----: Color				