


CABINET PLUG FANS

ENERGY
EFFICIENT
LONG LIFE

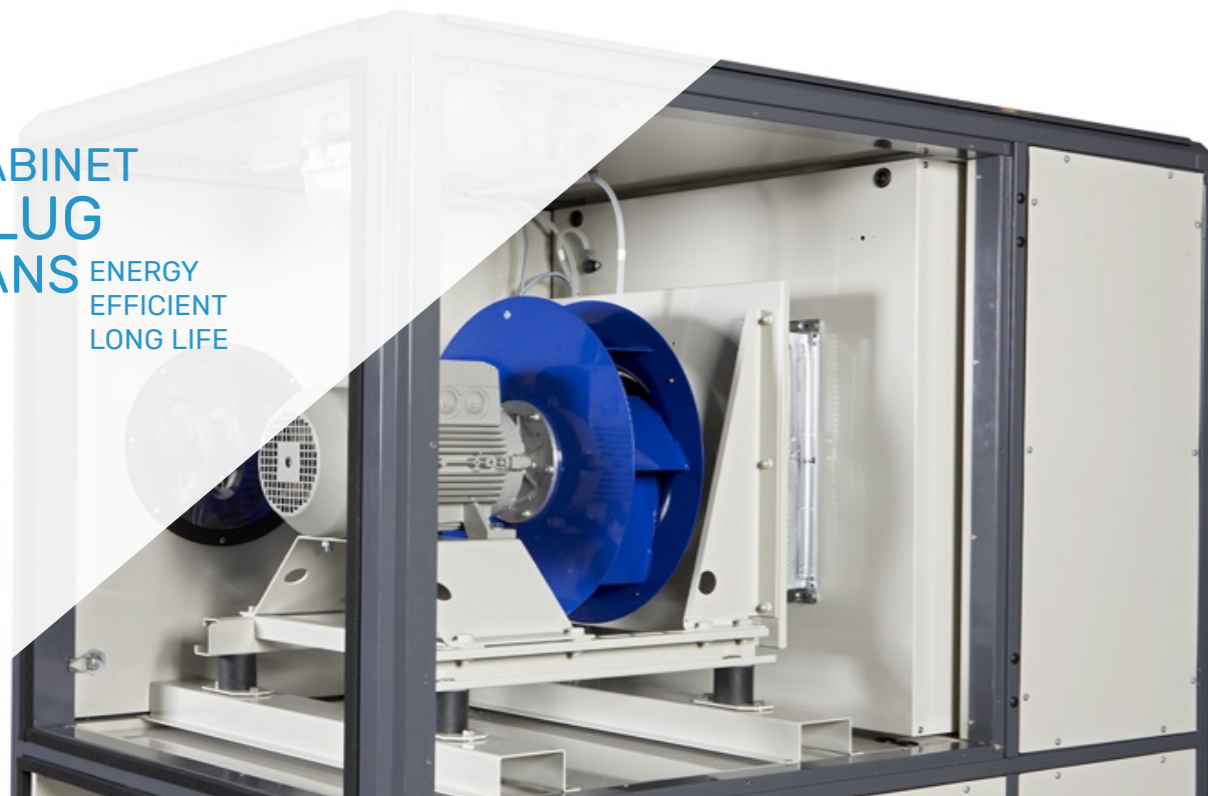


PRODUCT FEATURES

- Double Walled Cas-ing. 25 mm thick rock wool is used for heat and sound insulation
- Lightweight and durable forward curved blades provide high static pressure
- The outer sheets are painted and the inner sheets are manufactured from AZ 150 Aluzinc sheet with high corrosion resistance
- Traceable maintenance power switch

TECHNICS

MODEL	BOX 450	BOX 500	BOX 560	BOX 630	BOX 710
VOLTAGE (V)	230/380	380	380	380	380
FREQUENCY (Hz)	50	50	50	50	50
POWER (kW)	1,1	1,5	2,2	5,5	11
CURRENT (A)	7,5/2,6	3,5	4,9	11,5	21
AIR FLOW (m³/h)	7000	9750	14800	22500	30000

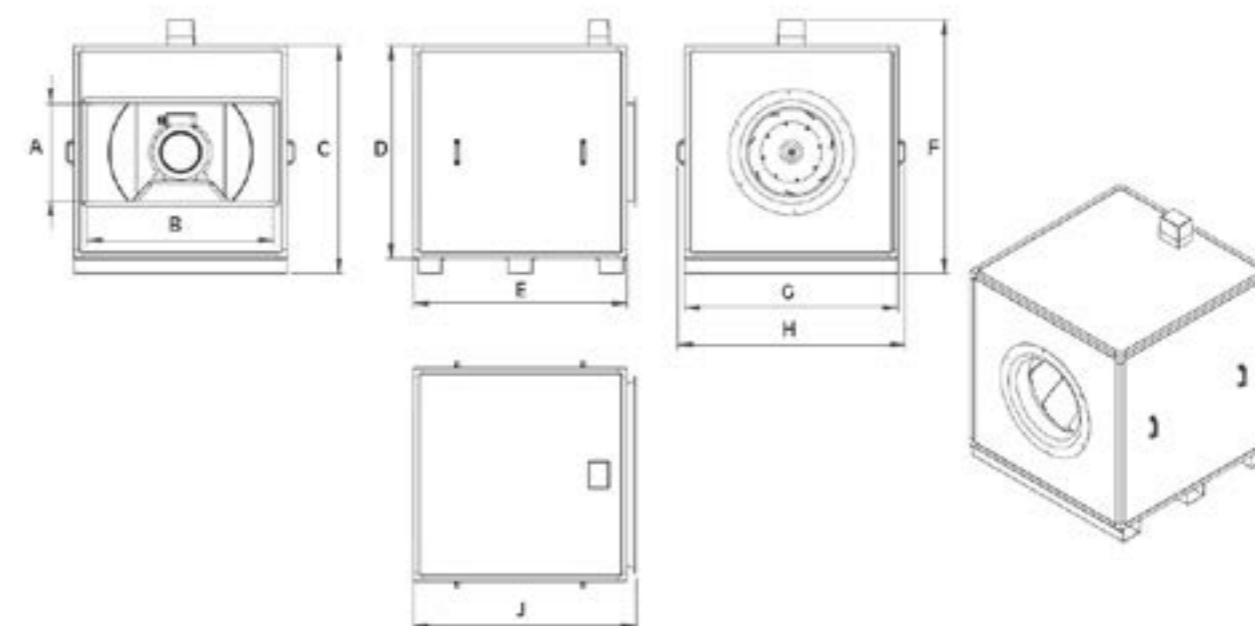

PERFORMANCES

MODEL	AIRFLOW (m³/h)									
	0 Pa	150 Pa	300 Pa	450 Pa	600 Pa	750 Pa	900 Pa	1050 Pa	1200 Pa	1350 Pa
BOX 450	7000	6400	5600	4450						
BOX 500	9750	9100	8250	7250	5500					
BOX 560	14800	14400	13500	12000	10400	7800	3200			
BOX 630	22500	21300	20650	19800	18600	16000	14900	11250		
BOX 710	30000	29250	28500	27750	26250	24750	23250	21000	18000	14250

DIMENSIONS

MODEL	A	B	C	D	E	F	G	H	J
BOX 450	348	548	802	698	698	947	698	780	749
BOX 500	348	648	887	798	798	1032	798	880	849
BOX 560	347	647	887	798	798	1032	798	879	851
BOX 630	423	847	1085	1000	1000	1229,6	1001	1082	1051,6
BOX 710	543	1047	1280	1195	1195	1245	1195	1277	1248,5