



Round Single Wing, Fusible Link

Fire Damper

MODEL YD243

Performance Data

EFFECTIVE AREA TABLE (m²)

Ø D (mm)	150	200	250	300	350	400	500	600	700	800	900	1000
A _{eff} [m ²]	0,012	0,024	0,040	0,059	0,083	0,111	0,178	0,260	0,359	0,473	0,602	0,748


PRESSURE LOSS DIAGRAM

$$P_t = P_l \cdot f$$

P_t = Corrected pressure loss [Pa]

P_l = Pressure loss on the diagram [Pa]

f = Pressure correction factor

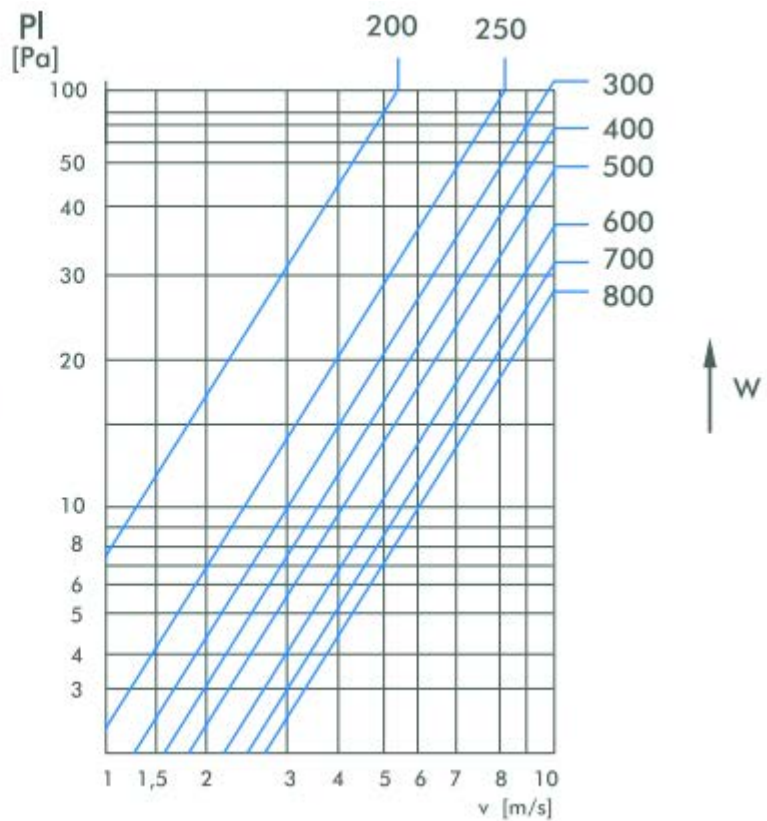

Submittal No.

Revision:

Date: 01/01/2019

Submitted by:

Date submitted: