Project:	
Tag:	
Engineer:	
Contractor:	
Date:	

LAMINAR FLOW UNITS IN OPERATING THEATRES
Stainless Steel

Model: **GLD**

Submittal: GLD Standard Units

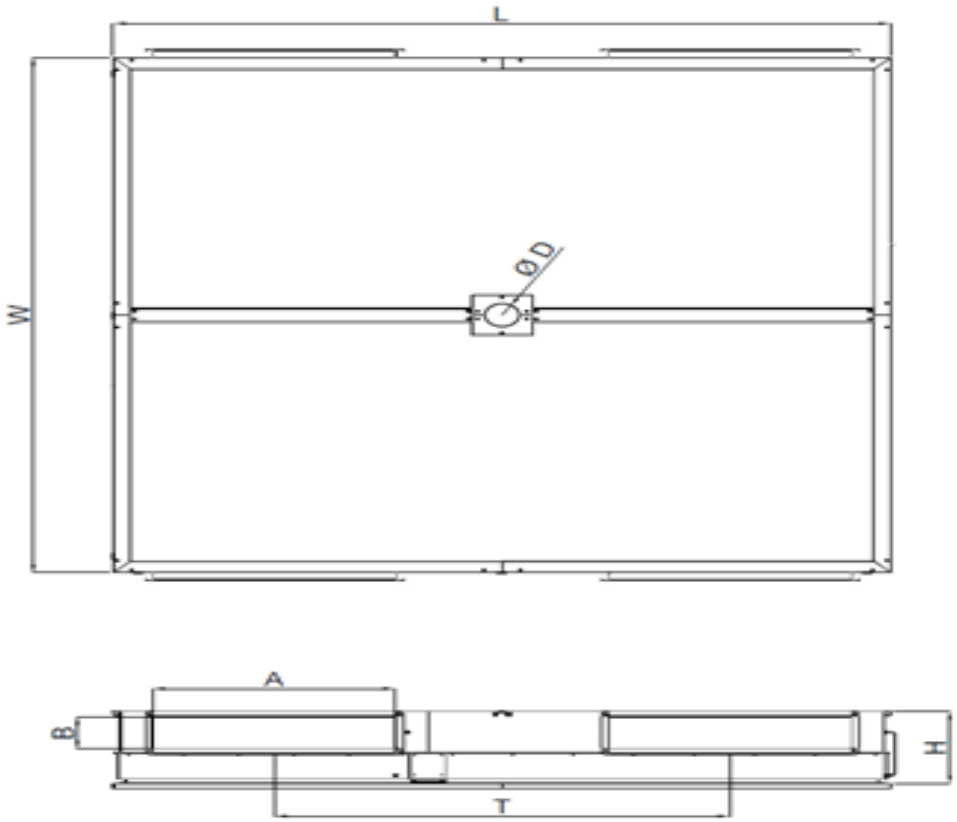

Code	Dimensions (mm)						Filter Quantity and Size
	W mm	L mm	H mm	A mm	B mm	T mm	
GLD - 1400x2400	1400	2400	450	600	200	-	850x465x80 / 2 - Pcs 720x350x80 / 6 - Pcs
GLD - 1600x2400	1600	2400	450	600	200	1192	850x465x80 / 2 - Pcs 720x450x80 / 6 - Pcs
GLD - 1800x2400	1800	2400	450	600	200	1192	850x465x80 / 2 - Pcs 720x550x80 / 6 - Pcs
GLD - 2400x2400	2400	2400	450	600	200	1192	804x530x80 / 10 Pcs
GLD - 2400x3000	2400	3000	450	600	200	1446	1104x530x80 / 2 - Pcs 804x530x80 / 10 - Pcs
GLD - 3000x3000	3000	3000	450	900	200	1778	1092x532x80 / 12 Pcs
GLD - 3200x3200	3200	3200	450	1000	200	1878	1192x565x80 / 12 Pcs
GLD - 3800x3800	3800	3800	450	1200	200	2180	1470x670x80 / 12 Pcs

Project:	
Tag:	
Engineer:	
Contractor:	
Date:	

Submittal: GLD

LAMINAR FLOW UNITS IN OPERATING THEATRES
Stainless Steel

Option: ☐ Two Filter Inlet
☐ Four Filter Inlet

Two Inlet

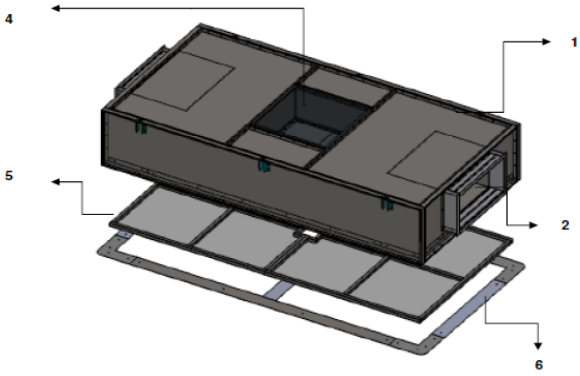

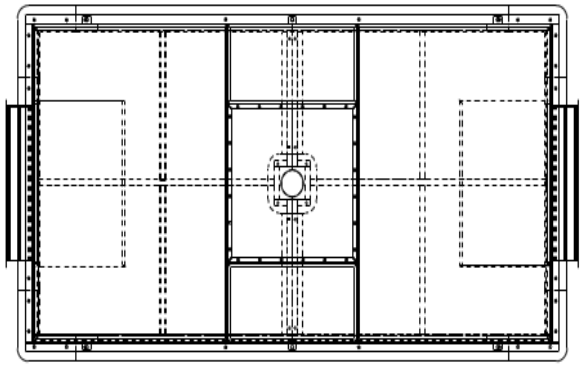

Four Inlet

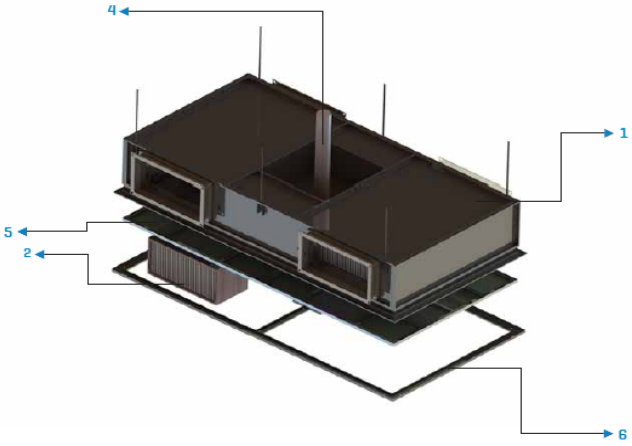

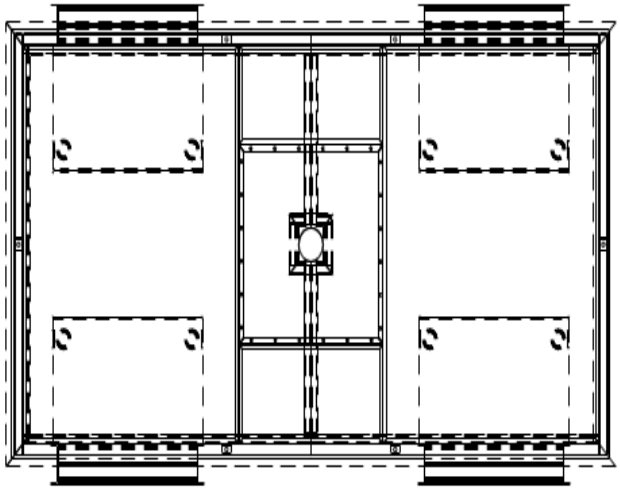

1 – Main Case
2 – H13/H14 Hepa Filter
3 – Inner Enlightning
4 – Pendant Box
5 – Laminiser
6 – Frame Parts

☐ Standard Material: 304 Stainless Steel.

☐ Optional:. Galvanized Steel Sheet